


Ex-cable glands

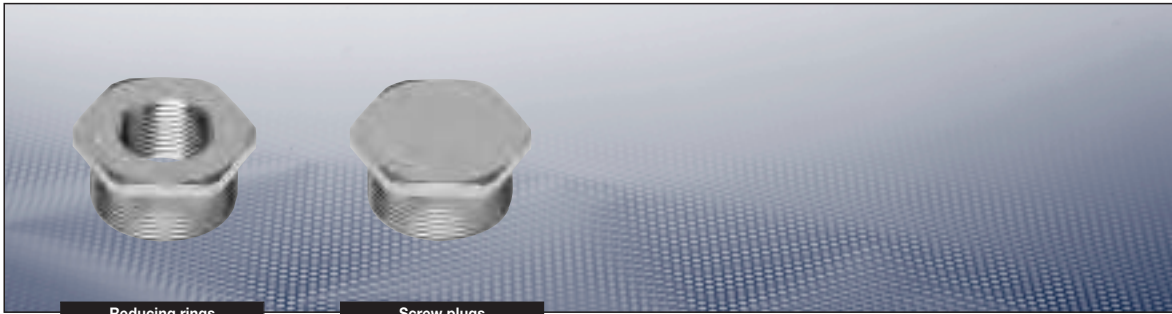


Reducing rings

Screw plugs

Technical data

Ex-d cable glands metal design Reducing rings Screw plug Adapter ISO-NPT	
Marking to 94/9/EC	⊕ II 2 G Ex e II / Ex d IIC / ⊕ II 2 D Ex tD
EC-Type Examination Certificate	LCIE 98 ATEX 0001 X
Permissible ambient temperature	-40 °C to +100 °C
Degree of protection accd. EN 60529	IP66 / IP68 - 10 bar
Enclosure material	Brass, nickel-plated

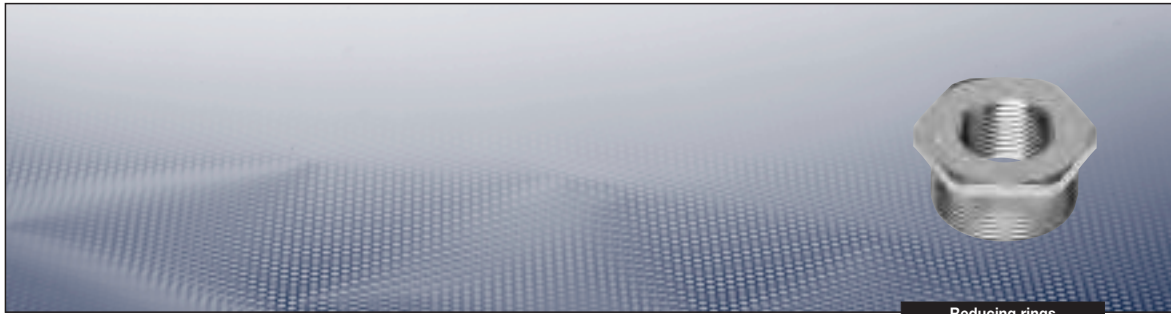

Reducing rings

Ordering details

Thread 1 (male)	Thread 2 (female)	A mm	L mm	E mm	Order No.
Reducing rings ISO for Metric thread					
M16 x 1.5	M12 x 1.5	18	2.8	15	CAP 745 834
M20 x 1.5	M12 x 1.5	23	3.0	15	CAP 745 844
M20 x 1.5	M16 x 1.5	23	3.0	15	CAP 740 024
M25 x 1.5	M16 x 1.5	28	3.0	15	CAP 740 034
M25 x 1.5	M20 x 1.5	28	3.0	15	CAP 740 294
M32 x 1.5	M20 x 1.5	36	3.5	15	CAP 740 304
M32 x 1.5	M25 x 1.5	36	3.5	15	CAP 740 564
M40 x 1.5	M25 x 1.5	44	4.0	15	CAP 740 574
M40 x 1.5	M32 x 1.5	44	4.0	15	CAP 740 834
M50 x 1.5	M32 x 1.5	54	5.0	16	CAP 740 844
M50 x 1.5	M40 x 1.5	54	5.0	16	CAP 741 104
M63 x 1.5	M40 x 1.5	67	5.5	17	CAP 741 114
M63 x 1.5	M50 x 1.5	67	5.5	17	CAP 741 374
M75 x 1.5	M32 x 1.5	80	6.0	18	CAP 740 864
M75 x 1.5	M40 x 1.5	80	6.0	18	CAP 741 124
M75 x 1.5	M50 x 1.5	80	6.0	18	CAP 741 384
M75 x 1.5	M63 x 1.5	80	6.0	18	CAP 741 644
M90 x 1.5	M63 x 1.5	95	8.0	22	CAP 745 854
M90 x 1.5	M75 x 1.5	95	8.0	22	CAP 745 864
M100 x 1.5	M75 x 1.5	110	10.0	22	CAP 745 874
M100 x 1.5	M90 x 1.5	120	10.0	22	CAP 745 914
M110 x 1.5	M90 x 1.5	120	11.0	22	CAP 745 924
M110 x 1.5	M100 x 1.5	120	11.0	22	CAP 745 934

Reducing rings NPT					
3/8"	1/4"	18	2.8	12	CAP 745 574
1/2"	2/4"	22	3.0	16	CAP 745 584
1/2"	3/8"	22	3.0	16	CAP 745 594
3/4"	3/8"	28	3.0	16	CAP 745 604
3/4"	1/2"	28	3.0	16	CAP 744 884
1"	1/2"	36	3.5	20	CAP 744 894
1"	3/4"	36	3.5	20	CAP 745 154
1 1/4	3/4"	44	4.0	20	CAP 745 164
1 1/4	1"	44	4.0	20	CAP 745 424
1 1/2	1"	50	5.0	20	CAP 745 434
1 1/2	1 1/4	50	5.0	20	CAP 745 694
2"	1"	64	5.5	20	CAP 745 444
2"	1 1/4	64	5.5	20	CAP 745 704
2"	1 1/2	64	5.5	20	CAP 745 964
2 1/2	1 1/2	75	6.0	28	CAP 745 974
2 1/2	2"	75	6.0	28	CAP 746 234
3"	2"	90	8.0	30	CAP 746 244
3"	2 1/2	90	8.0	30	CAP 746 504
3 1/2	2 1/2	110	10.0	32	CAP 745 654
3 1/2	3"	110	10.0	32	CAP 745 664
4"	3"	120	11.0	32	CAP 746 834
4"	3 1/2	120	11.0	32	CAP 745 734